



Dimension: (Unit: mm)

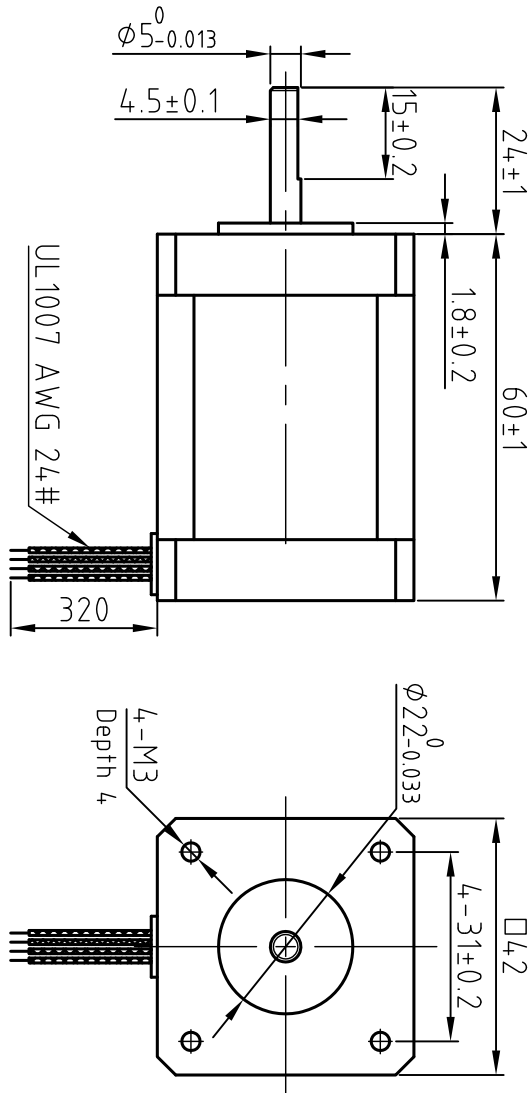

版本 Rev:	日期 Date	变更文件号 ECU NO.	变更内容 Revisions	设计 By

Motor Connetions:

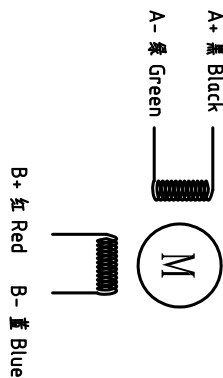

Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩhm(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max:0.02mm(load 4.50g)
Axial play	Max:0.08mm(load 900g)

Specification:

Current/phase	2.0 A
Voltage	3 V
DC Resistance/phase ±10%	1.8 Ω
Inductance/phase ±20%	3.7 mH
Holding torque	0.7 N·M
Inertia	0.11 kg·cm <sup>2</sup>
Weight	0.5 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First angle projection	混合式步进电机
批准 Approved		重量/比例 Weight/Scale	4.2HS07A
图号 Part No.		图号 DWG. NO.	

共 1 张 第 1 张 Sheet 1 of 1