

Shenzhen Leadshine Technology Co.,Ltd.

57HS22-LN


COMMON RATINGS

Step angle: 1.8°	Dielectric strength: 500VDC
Positional accuracy: +/-5%	Insulation resistance: 100MΩ(500VDC)
Number of Phase: 4	Radial play: 0.025mm max.(load 450g)
Temperature rise: 80°C Max	Insulating class: B
Inertia: 480 g.cm ²	Weight: 1.15 kg


SPECIFICATIONS

	Holding Torque (2 phases on) N.m ±10%	Rated Current/Phase (Amps DC)	Phase Resistance (ohms) ±10%	Phase Inductance (mH) ±20% Typical
Bipolar(Parallel)	2.0	5.0	0.4	1.8
Bipolar(Series)	2.0	2.5	1.6	7.2
Unipoar	1.4	3.5	0.8	1.8

DIMENSIONS unit=mm

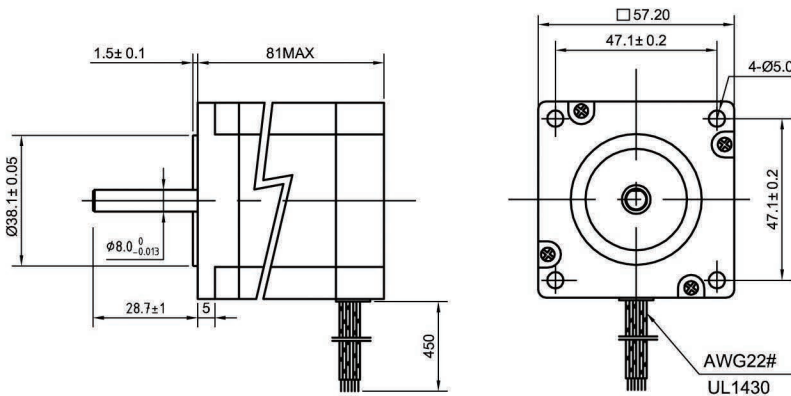

CONNECTIONS

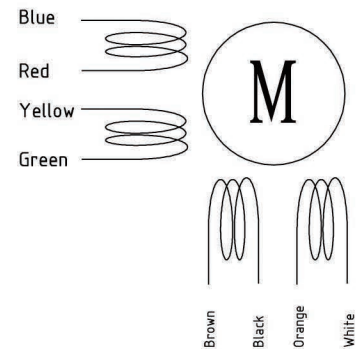

Wirings Connection Diagram

Bipolar (Parallel) Connection	Bipolar (Series) Connection	Unipolar Connection
<p>Blue A+ Red A- Yellow Green B+ White B-</p>	<p>Blue A+ Red Yellow Green A- White B-</p>	<p>Blue A+ Red Acom Yellow Green A- White B-</p>