

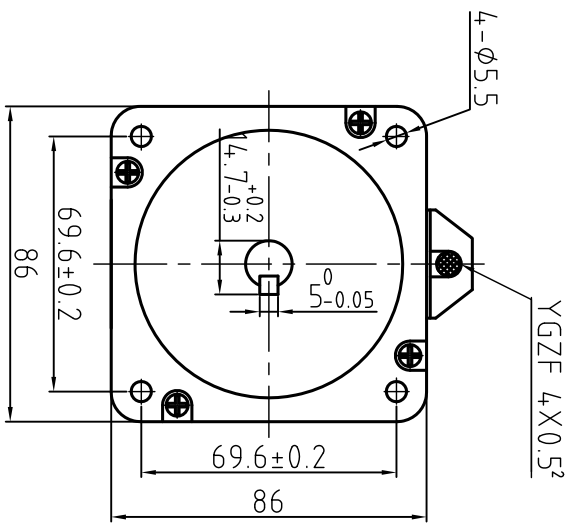


Dimension: (Unit: mm)

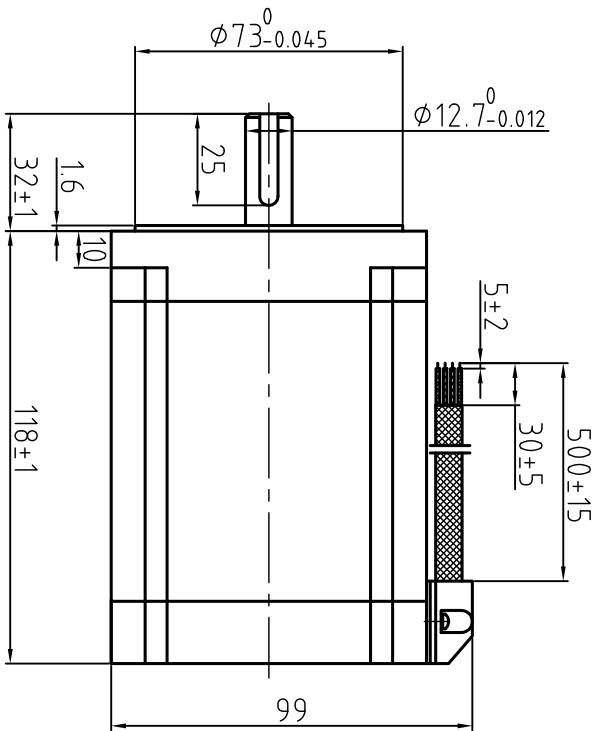

Motor Connctions

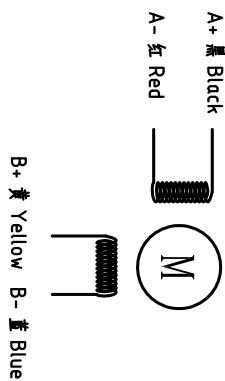

Common Rating

Step angle	1.8°
Position accuracy	18±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩmin(500VDC)
Insulation class	B
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 4.50g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	6.0 A
Voltage	3 V
DC Resistance/phase	0.5 Ω
Inductance/phase	4.2 mH
Holding torque	8.5N•M
Inertia	2.8 kg•cm²
Weight	4 kg

设计 Designed	日期 Date	材料 Material	深圳市雷赛智能控制股份有限公司 SHENZHEN LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked		第一角画法 First Angle projection	混合式步进马达
批准 Approved		重量Weight 比例Scale 防误标记Stage Mark	86HS85D
图号 Part No.	共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	